


Africa Twin CRF1000L plug-and-play fog / spot light cable harness

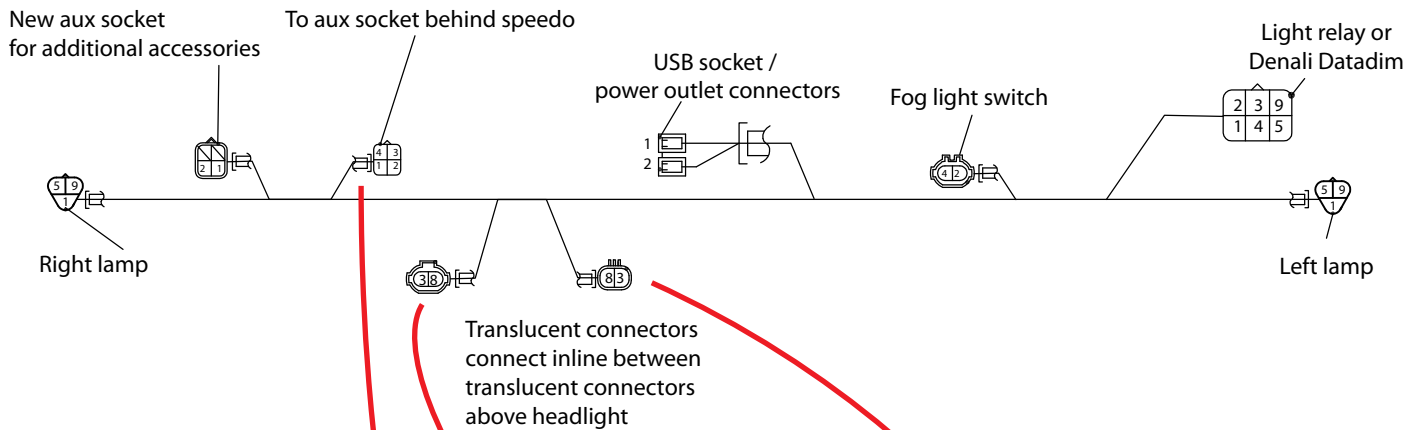

- | | | |
|---|-----|---|
| 1 | G | negative |
| 2 | R/Y | +12v |
| 3 | L | high beam switch |
| 4 | L/B | fog light switch |
| 5 | R/G | fog power |
| 6 | B | from diodes |
| 7 | L/Y | high beam power |
| 8 | W/B | low beam power |
| 9 | Y | Denali dim control or shutter output for dual beam LED lights |

2 pin and 4 pin translucent connectors fit inline between existing 2 pin and 4 pin connectors above the headlight

Denali lights plug and play into black triangular connectors

If using your own LED lights fit terminals and insert wires into black triangular connectors
Green wire is negative (0v) and Red/Green is positive (+12v)

Yellow wire can operate LED shutter or Denali datadim only - Do not connect LED light power to yellow wire